

# **OWNER'S MANUAL**

US PATENT PENDING




**The**  
**Bottom Feeder Filter Assembly**  
*"It sucks to clean pools!"*



1

Position Filter Assembly over the cylinder (1 rod facing front, space between 2 rods facing towards back, strap unclashed) and pull cylinder braces outward while lowering to clear halo guard.

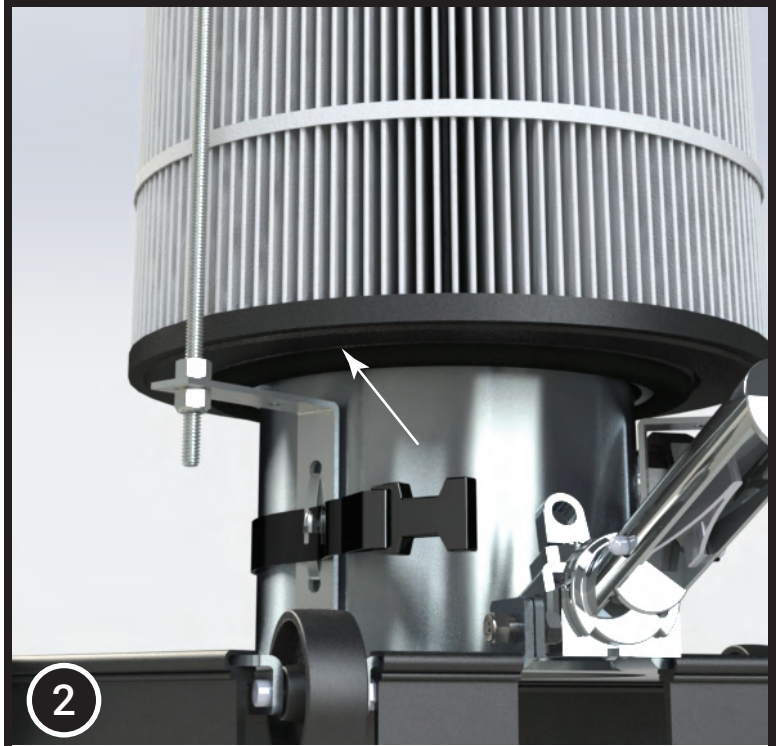


2

Securely dock Filter Assembly cartridge to the cylinder. Make sure the bottom of the filter cartridge is securely resting on the top of the halo guard.



3

Latch the clips on the cylinder brace strap to secure Filter Assembly to The Bottom Feeder. Check strap fit and make sure there is a snug fit. Adjust strap if necessary.

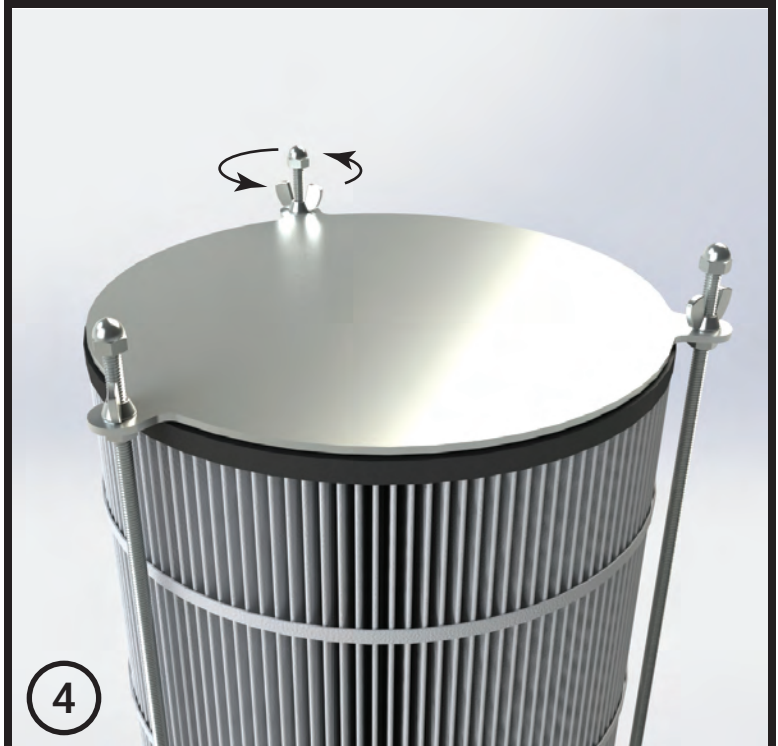

4


Once Filter Assembly is attached, adjust wingnuts at top to secure a stable fit. Be careful to not tighten down top cover too much as it will begin to warp the pleats of the filter cartridge.





5

Slide pole through both support rings on the battery pack with the chrome connector flap pointing up toward handle of pole.

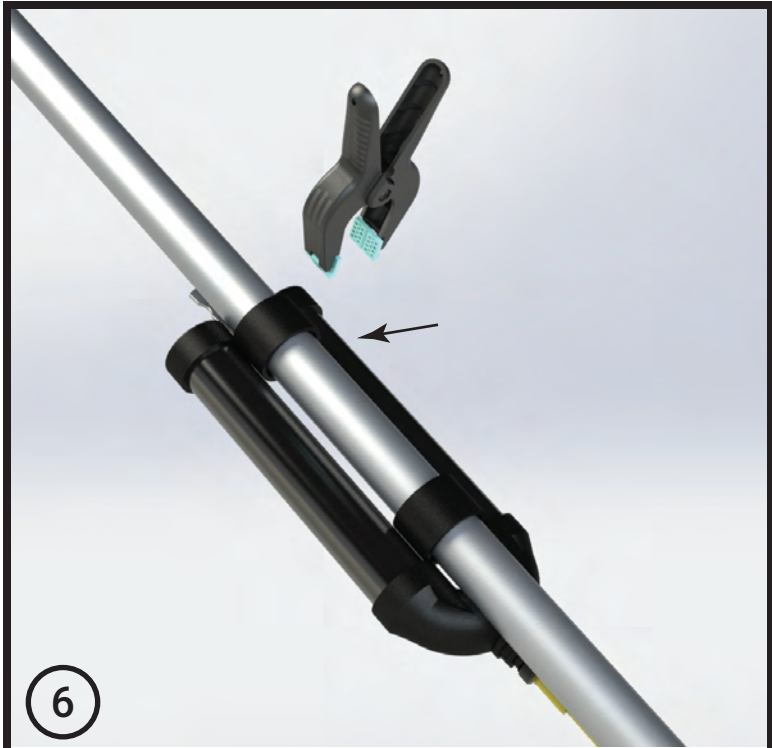


6

Position battery pack on pole about 24" - 30" from the bottom using the clamp included with the Filter Assembly.



7

Clip the clamp in place and adjust higher or lower as needed.

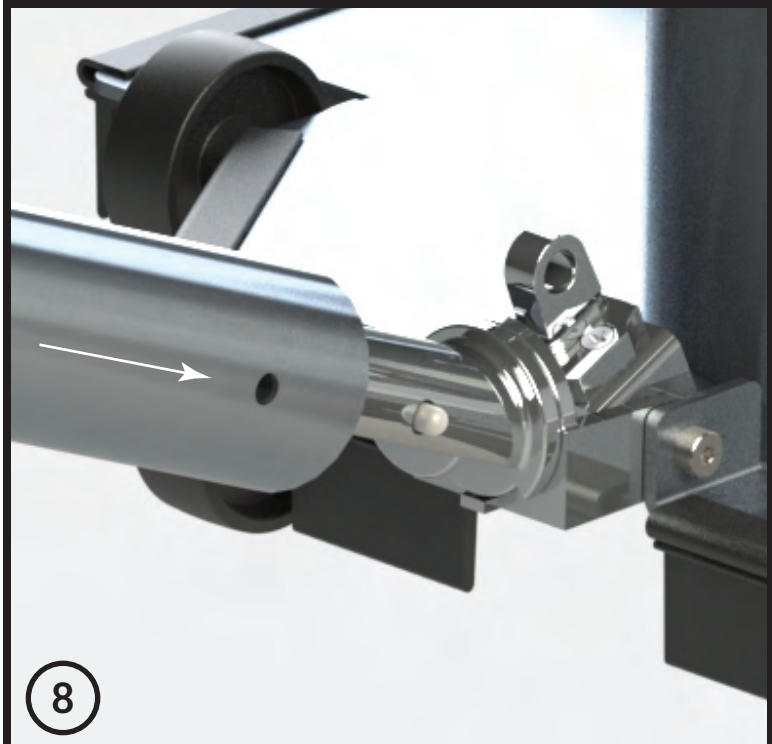

8

Attach pole to swivel handle on The Bottom Feeder body.



9

Connect the battery cable with notched end facing up.

**\*WARNING: MOTOR IS ENGAGED & PROPELLER STARTS TO SPIN AS SOON AS BATTERY CONNECTOR CONTACTS THE RECEPTACLE ON HEAD. KEEP HANDS AND OBJECTS CLEAR OF PROPELLER.**



10

Finger tighten the lock nut on the battery connector onto the receptacle on head of unit. Do not run dry more than a minute.

**\*CAUTION: PUSH CONNECTOR STRAIGHT IN AND OUT. DO NOT OVER TIGHTEN OR WIGGLE CONNECTOR ON BATTERY CABLE OR INTERNAL DAMAGE MAY OCCUR CAUSING FAILURE.**



11

Fully Assembled Bottom Feeder Unit with Filter Assembly.

**\*REMEMBER: PROP IS SPINNING WHEN BATTERY CABLE IS PLUGGED IN!!!**



12

To remove filter cartridge, place upside-down on deck. Disconnect battery cable and remove Bottom Feeder unit. We recommend rinsing inside pleats of filter after each use with garden hose equipped with pressure nozzle.